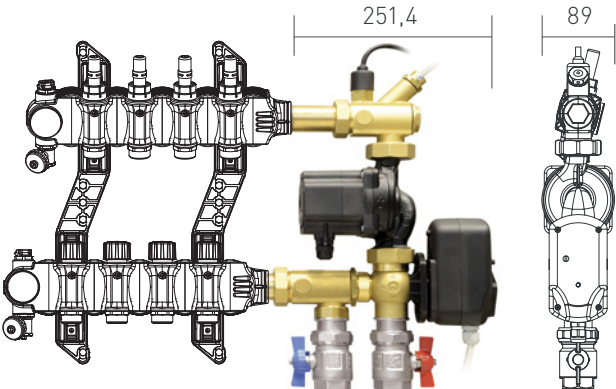
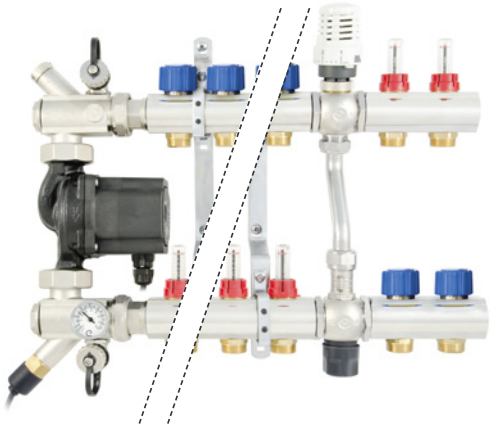


Control system **COMMAND**

	ARTICLE	DESCRIPTION
	<p>104500249</p>	<p>Command Mix SL</p> <p>Command mix SL: is a climate control system equipped with a 3-way mixing valve, designed for adjusting the heat supply to the building's heating requirements and guaranteeing optimal performance in terms of comfort. Flow characteristic of the mixing valve: $K_v=4,5$</p> <ul style="list-style-type: none"> → variable speed electronic circulation pump → 3-way mixing valve → actuator → safety thermostat → electronic delaying device
	<p>105000010</p>	<p>Command Duo S</p> <p>Command Duo S: this is a complete heating and cooling climate regulation system of the fluid circulating in the radiant system based on the external temperature (clima version), or as fixed point version. The Command Duo S is ready to be connected to the serie S-SF manifold and has 1" F attachments to be able to serve a second high temperature system manifold. It works by injecting water from the main circuit.</p>